


OPEN GATE SINGLE NOZZLE


PRODUCT HIGHLIGHTS

- ❏ HEATED HEAD
- ❏ NOZZLE TIP AND NOZZLE POSITION INDEXED (WILL ALWAYS BE IN ITS ORIGINAL POSITION)
- ❏ REMOVABLE AND HARDENED NOZZLE SEAT
- ❏ HIGH PERFORMANCE TIP TECHNOLOGY FOR AESTHETICAL OR GLASS FIBER REINFORCED PARTS
- **TECHTIP FOR TECHNICAL MATERIALS**
- **EASYTIP FOR POLYOLEFINS**
- **PINPOINT OR FREEFLOW**
- ❏ AVAILABLE WITHOUT CABLETRUNK



PIN POINT

- RECOMMENDED WHEN VESTIGE QUALITY IS CRITICAL
- PREVENTS STRINGING



FREE FLOW

- RECOMMENDED FOR GLASS FIBER FILLED PLASTICS

RHEOLOGY : STANDARD DIAMETERS TO SUIT ALL INJECTION NEEDS

CLASS 1

NOZZLE A

- NOT AVAILABLE

NOZZLE B

- Ø 16, 18, 20 MM
- GATE Ø 3, 4, 5 MM


CLASS 2

NOZZLE C

- Ø 10, 12, 14 MM
- GATE Ø 2, 3, 4 MM

TOOL INTEGRATION : COMPACT DESIGN

CLASS 1

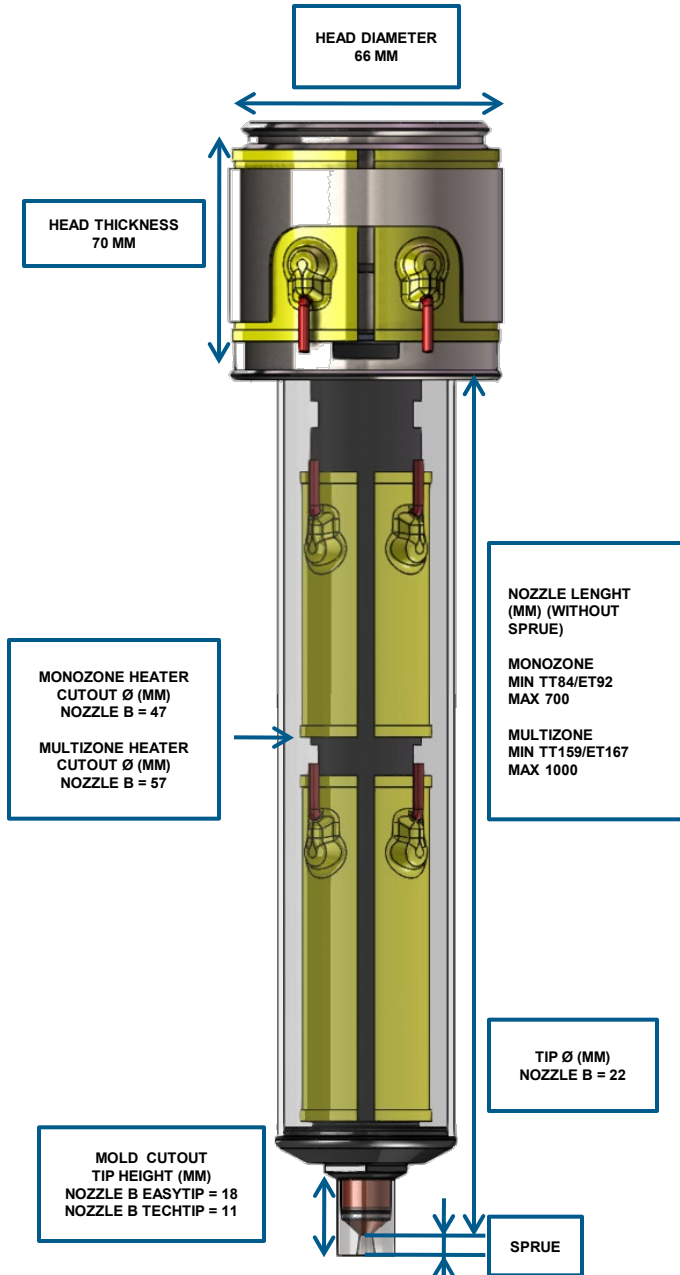

CLASS 2

