


Thermal gate hot runner systems.

PRODUCT HIGHLIGHTS

- ✔ **Compact thickness: 70 mm (class 1)**
- ✔ Nozzle tip and nozzle position indexed (will always be in an accurate position)
- ✔ Available with or without cabletrunk
- ✔ High performance tip technology for aesthetical or glass fiber reinforced parts:
 - ✔ Techtip for all materials
 - ✔ Pinpoint or freeflow

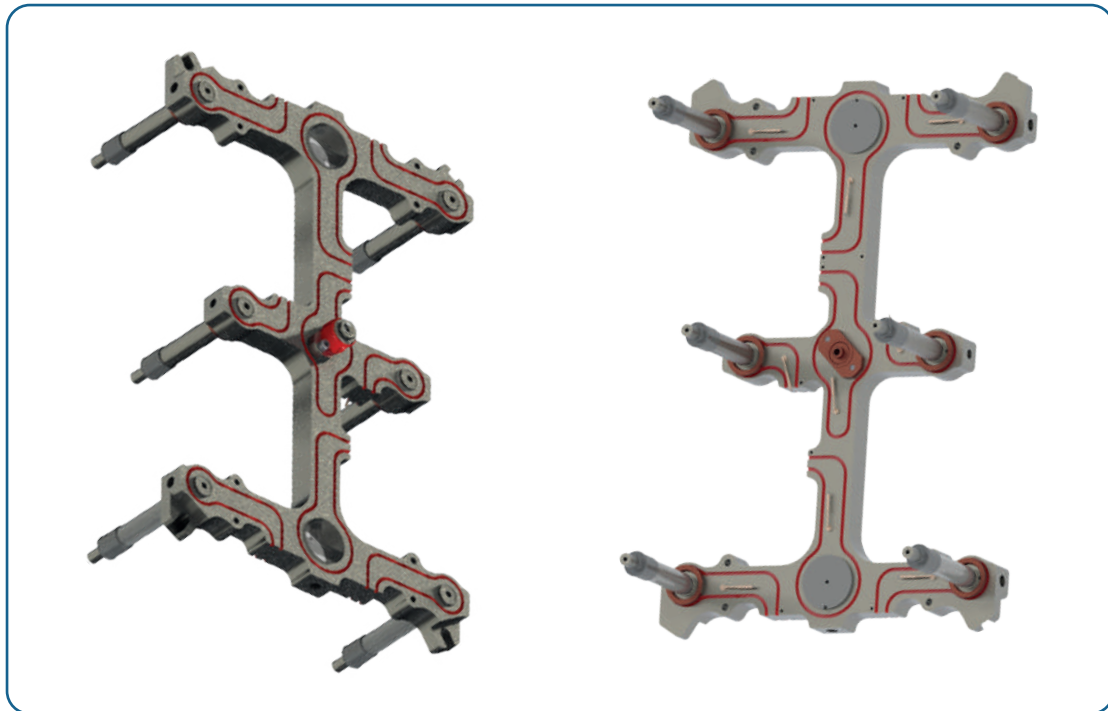


CANALFLOW

FREE FLOW:



Recommended for glass fiber filled plastics

PIN POINT:

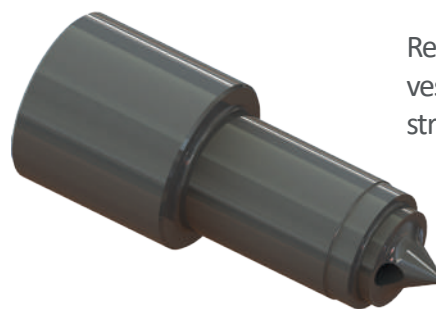

Recommended for high vestige quality and gate string prevention

RHEOLOGY


Standard diameters to suit all injection needs.

NOZZLE A:

Not available

NOZZLE B:

Ø 16, 18, 20 mm
Gate Ø 3, 4, 5 mm

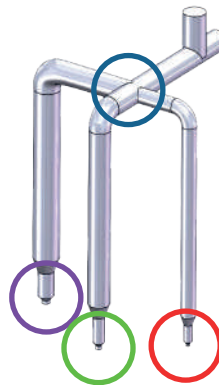


MANIFOLD:

Ø 10, 12, 14, 16,
18, 20 mm

NOZZLE C:

Ø 10, 12, 14 mm
Gate Ø 2, 3, 4 mm

COMPACT DESIGN

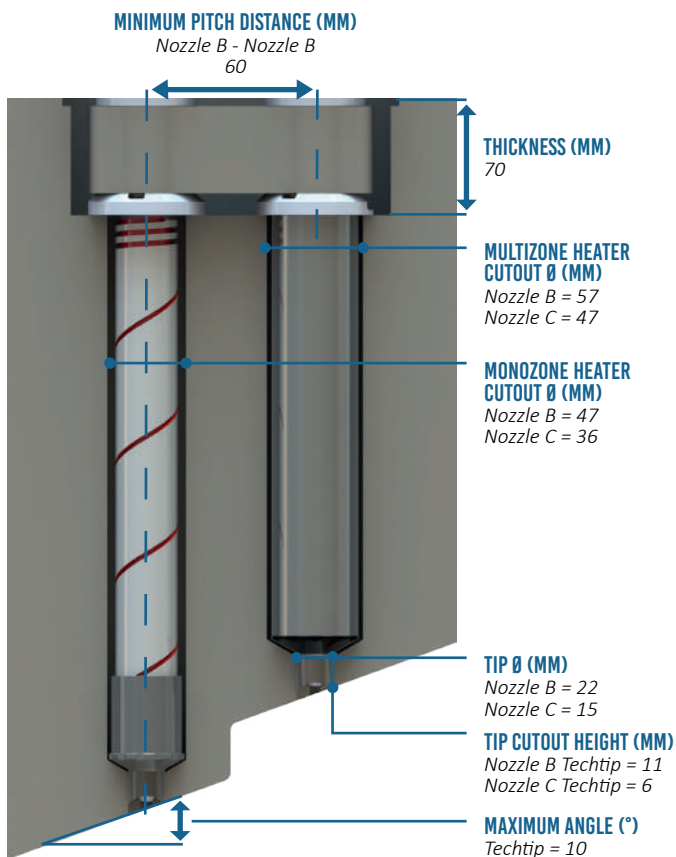

Many standard solutions have been developed to suit all injection situations:

- ☑ 2k molds
- ☑ Fast color change
- ☑ Increase L/Z ratio